


TYPE#1 15° - 15° HANGER

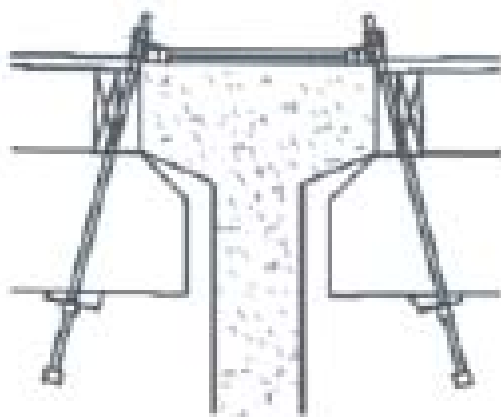

Hanger BH-HFRL are designed to have bolts at 15° from the vertical. Where 90° hanger provide support too close to the end of the ledgers, the HFRL support is away from the end of ledgers.

HFRL Hanger consists of two 1/2" dia. 15° pressed steel HFRL end clips welded to a single wire strut. The hanger permits installation and adjustment from atop the deck. The 15° - 15° HFRL Hanger has a nominal 3/8" haunch relief.

OCM Part No.	Dia	Safe Working Load lbs
BH-HFRL	1/2"	3,800

-SWL provides a safety factor of approximately 2 to 1.

-Please specify flange width and finish (PLAIN or HDG) when ordering.