


SCAFFOLDING/ SHORING PRODUCTS



Guard Rail Post Bracket

Slab Grabber - Standard Duty

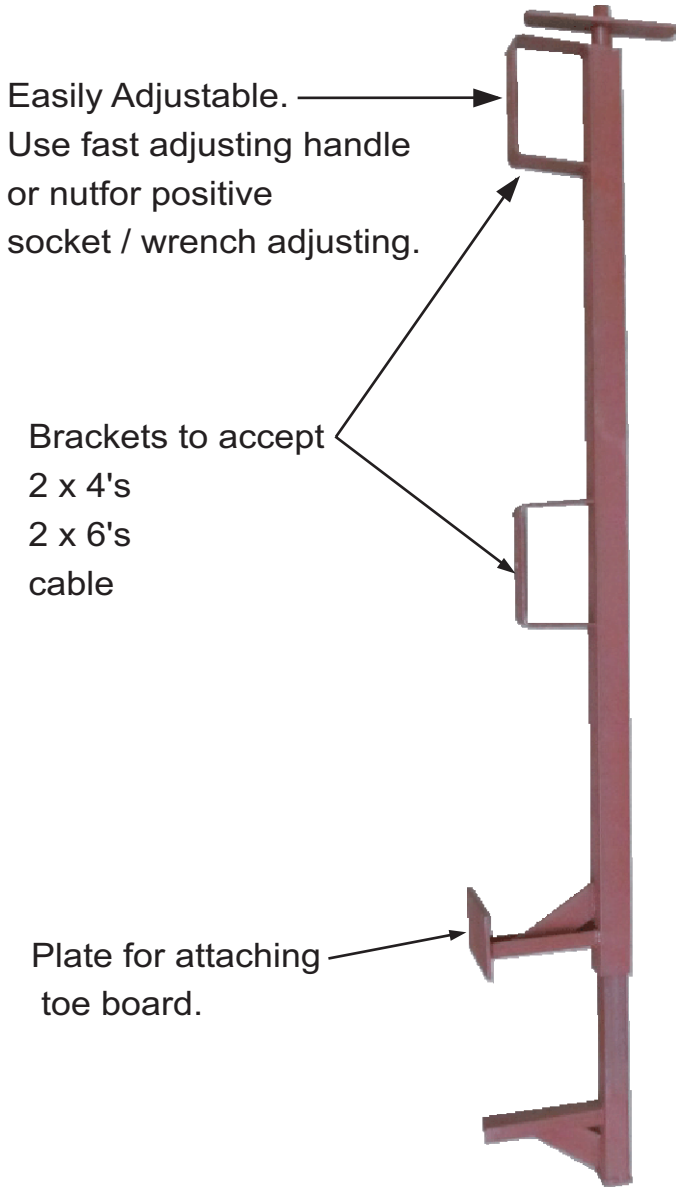

Easily Adjustable. Use fast adjusting handle or nut for positive socket / wrench adjusting.

Brackets to accept 2 x 4's 2 x 6's cable

Plate for attaching toe board.

- Quick adjust handle and rugged steel construction for fast attachment and a positive grip on the slab
- Adjustability for use on up to 36" slabs
- Installation requires 20 ft/lbs of torque to secure Slab Grabber to slab edge
- Plate to mount toe board when required or when surface slope is more than 4/12(vertical/horizontal) and if there is a risk of any type of work material to fall to a lower level
- Maximum spacing of 8 ft per OSHA spec
- Height from top of slab to top of rail is 46"
- Meets all applicable OSHA and ANSI Standards

| OCM Part No. | Description | Weight lbs | Skid |
|--------------|--|------------|------|
| OCM-GRP-STD | Guard Rail Post Bracket - Standard Duty Primer Painted | 22.00 | 200 |

*WARNING: Rail Post must be secured to deck with proper fasteners to ensure safety.

*WARNING: Use of equipment for unintended applications could result in serious injury or death. NEVER make any connections to guardrail system.

*WARNING: NEVER lean or climb on guardrail systems.