


# 2 Strut Conefast Coil Tie 1/2"



## Technical Product Data Sheet

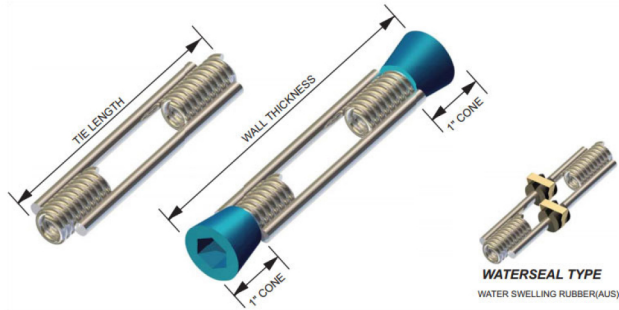

### Description

OCM Conefast Coil Ties are one of the most economical and versatile form tie systems available. They are commonly used with self cleaning Coil Rod or Coil Bolts. The Conefast coil Ties have extended coils that protrude beyond the end of the struts allowing for a Conefast (Screw On) Cone to be attached.

### Features

- When used with cones they will provide a setback of metal to reduce corrosion staining on finished wall
- Can be provided as plain or mechanically galvanized
- When used with cones can be used as combination tie and form spreader
- Used for architectural walls, and can also be used without cones

| OCM Part No. | Wall Thickness (With 1" Setback) | Tie Length | Box Qty | Weight / pcs lbs | Safe Working Load lbs |
|--------------|----------------------------------|------------|---------|------------------|-----------------------|
| CT5004SP     | 6                                | 4          | 100     | 0.32             | 4,500 lbs.            |
| CT5006SP     | 8                                | 6          | 100     | 0.32             | 4,500 lbs.            |
| CT5008SP     | 10                               | 8          | 100     | 0.32             | 4,500 lbs.            |
| CT5010SP     | 12                               | 10         | 100     | 0.36             | 4,500 lbs.            |
| CT5012SP     | 14                               | 12         | 100     | 0.42             | 4,500 lbs.            |
| CT5014SP     | 16                               | 14         | 100     | 0.466            | 4,500 lbs.            |
| CT5016SP     | 18                               | 16         | 100     | 0.512            | 4,500 lbs.            |
| CT5018SP     | 20                               | 18         | 100     | 0.558            | 4,500 lbs.            |
| CT5020SP     | 22                               | 20         | 100     | 0.604            | 4,500 lbs.            |
| CT5022SP     | 24                               | 22         | 100     | 0.65             | 4,500 lbs.            |
| CT5024SP     | 26                               | 24         | 100     | 0.696            | 4,500 lbs.            |
| CT5026SP     | 28                               | 26         | 100     | 0.742            | 4,500 lbs.            |
| CT5028SP     | 30                               | 28         | 100     | 0.788            | 4,500 lbs.            |
| CT5030SP     | 32                               | 30         | 100     | 0.834            | 4,500 lbs.            |
| CT5032SP     | 34                               | 32         | 100     | 0.88             | 4,500 lbs.            |
| CT5034SP     | 36                               | 34         | 100     | 0.926            | 4,500 lbs.            |
| CT5036SP     | 38                               | 36         | 100     | 1                | 4,500 lbs.            |
| CT5042SP     | 44                               | 42         | 100     | 1.1              | 4,500 lbs.            |

**Comments:** \*\*Additional lengths available upon request. \*\*Waterseal available upon request. -SWL provides a safety factor of approximately 2 to 1.

### OCM Limited Warranty

All recommendations, statements and technical data contained herein are based on tests we believe to be reliable and correct; however, accuracy and completeness of said tests are not guaranteed and are not provided as an express or implied warranty. User shall rely on his or her own information and tests to determine suitability of the product for the intended use and user assumes all risk and liability resulting from his or her use of the product. In the event that a product supplied by OCM, Inc. proves to not meet the OCM, Inc. published dimensional or other specifications of the product, an OCM, Inc. representative will review such product and circumstances to determine whether a replacement is warranted. OCM, Inc.'s and its manufacturer's sole responsibility shall be to replace, at OCM, Inc.'s sole discretion that product or portion of the product which OCM, Inc. deems to be defective, within six months of the delivery of the product.

*OCM, Inc. disclaims all other warranties or conditions, whether express or implied, including an implied warranties of merchantability or fitness for any particular purpose. In no event shall OCM, Inc. or its parent or affiliated companies be liable for delay caused by defects, for loss of use, or for any indirect, incidental, special, or consequential damages or for any charges or expenses of any nature whatsoever. In no event shall OCM, Inc.'s liability exceed the purchase price paid for the particular affect OCM, Inc. products.*

## **OCM, Inc.**

**1120 E. Peterson Road, Grayslake, IL 60030**

**Toll Free: 866-457-5710 • Phone: 847-462-4258 • FAX: 847-462-4259**

**sales@ocm-inc.com**

Please do not place orders with this email address, it is for informational purposes only.